












# SPECIFICATIONS

	EcoLift 50	EcoLift 70	830P	1030P
 <b>WORKING HEIGHT</b>	11-ft / 3.33-m	13-ft / 4.03-m	14-ft / 4.32-m	16-ft 2-in / 4.9-m
 <b>PLATFORM HEIGHT</b>	5-ft / 1.50-m	7-ft / 2.20-m	8-ft / 2.49-m	10-ft 2-in / 3.1-m
 <b>STOWED HEIGHT</b>	61-in / 1.55-m	76-in / 1.94-m	61.4-in / 1.56-m	72.8-in / 1.85-m
 <b>MACHINE WIDTH</b>	27.5-in / 0.7-m	27.5-in / 0.7-m	29.5-in / 0.75-m	30-in / .76-m
 <b>MACHINE LENGTH</b>	38.7-in / 0.98-m	50.3-in / 1.28-m	47-in / 1.19-m	63-in / 1.60-m
 <b>PLATFORM SIZE</b>	28 x 24-in / 0.71 x 0.6-m	33 x 25-in / 0.85 x 0.65-m	39 x 29-in / 1 x 0.75-m	29.5 x 60-in / .75 x 1.52-m
 <b>CAPACITY</b>	330-lb / 150-kg	330-lb / 150-kg	440-lb / 200-kg	550-lb / 249-kg
 <b>WEIGHT</b>	397-lb / 180-kg	672-lb / 305-kg	628-lb / 285-kg	753-lb / 342-kg
 <b>MAX GROUND BEARING PRESSURE FRONT</b>	160 psi	170 psi	173 psi	489 psi
 <b>MAX GROUND BEARING PRESSURE REAR</b>	168 psi	75 psi	166 psi	321 psi
 <b>POWER SOURCE</b>	n/a	n/a	Battery 12V 120 AMP-HR	Battery 12V 120 AMP-HR



We provide coverage for one (1) full year, and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable ANSI and CSA requirements based on machine configuration as originally manufactured for intended applications. Please reference the serial number plate on the machine for additional information.

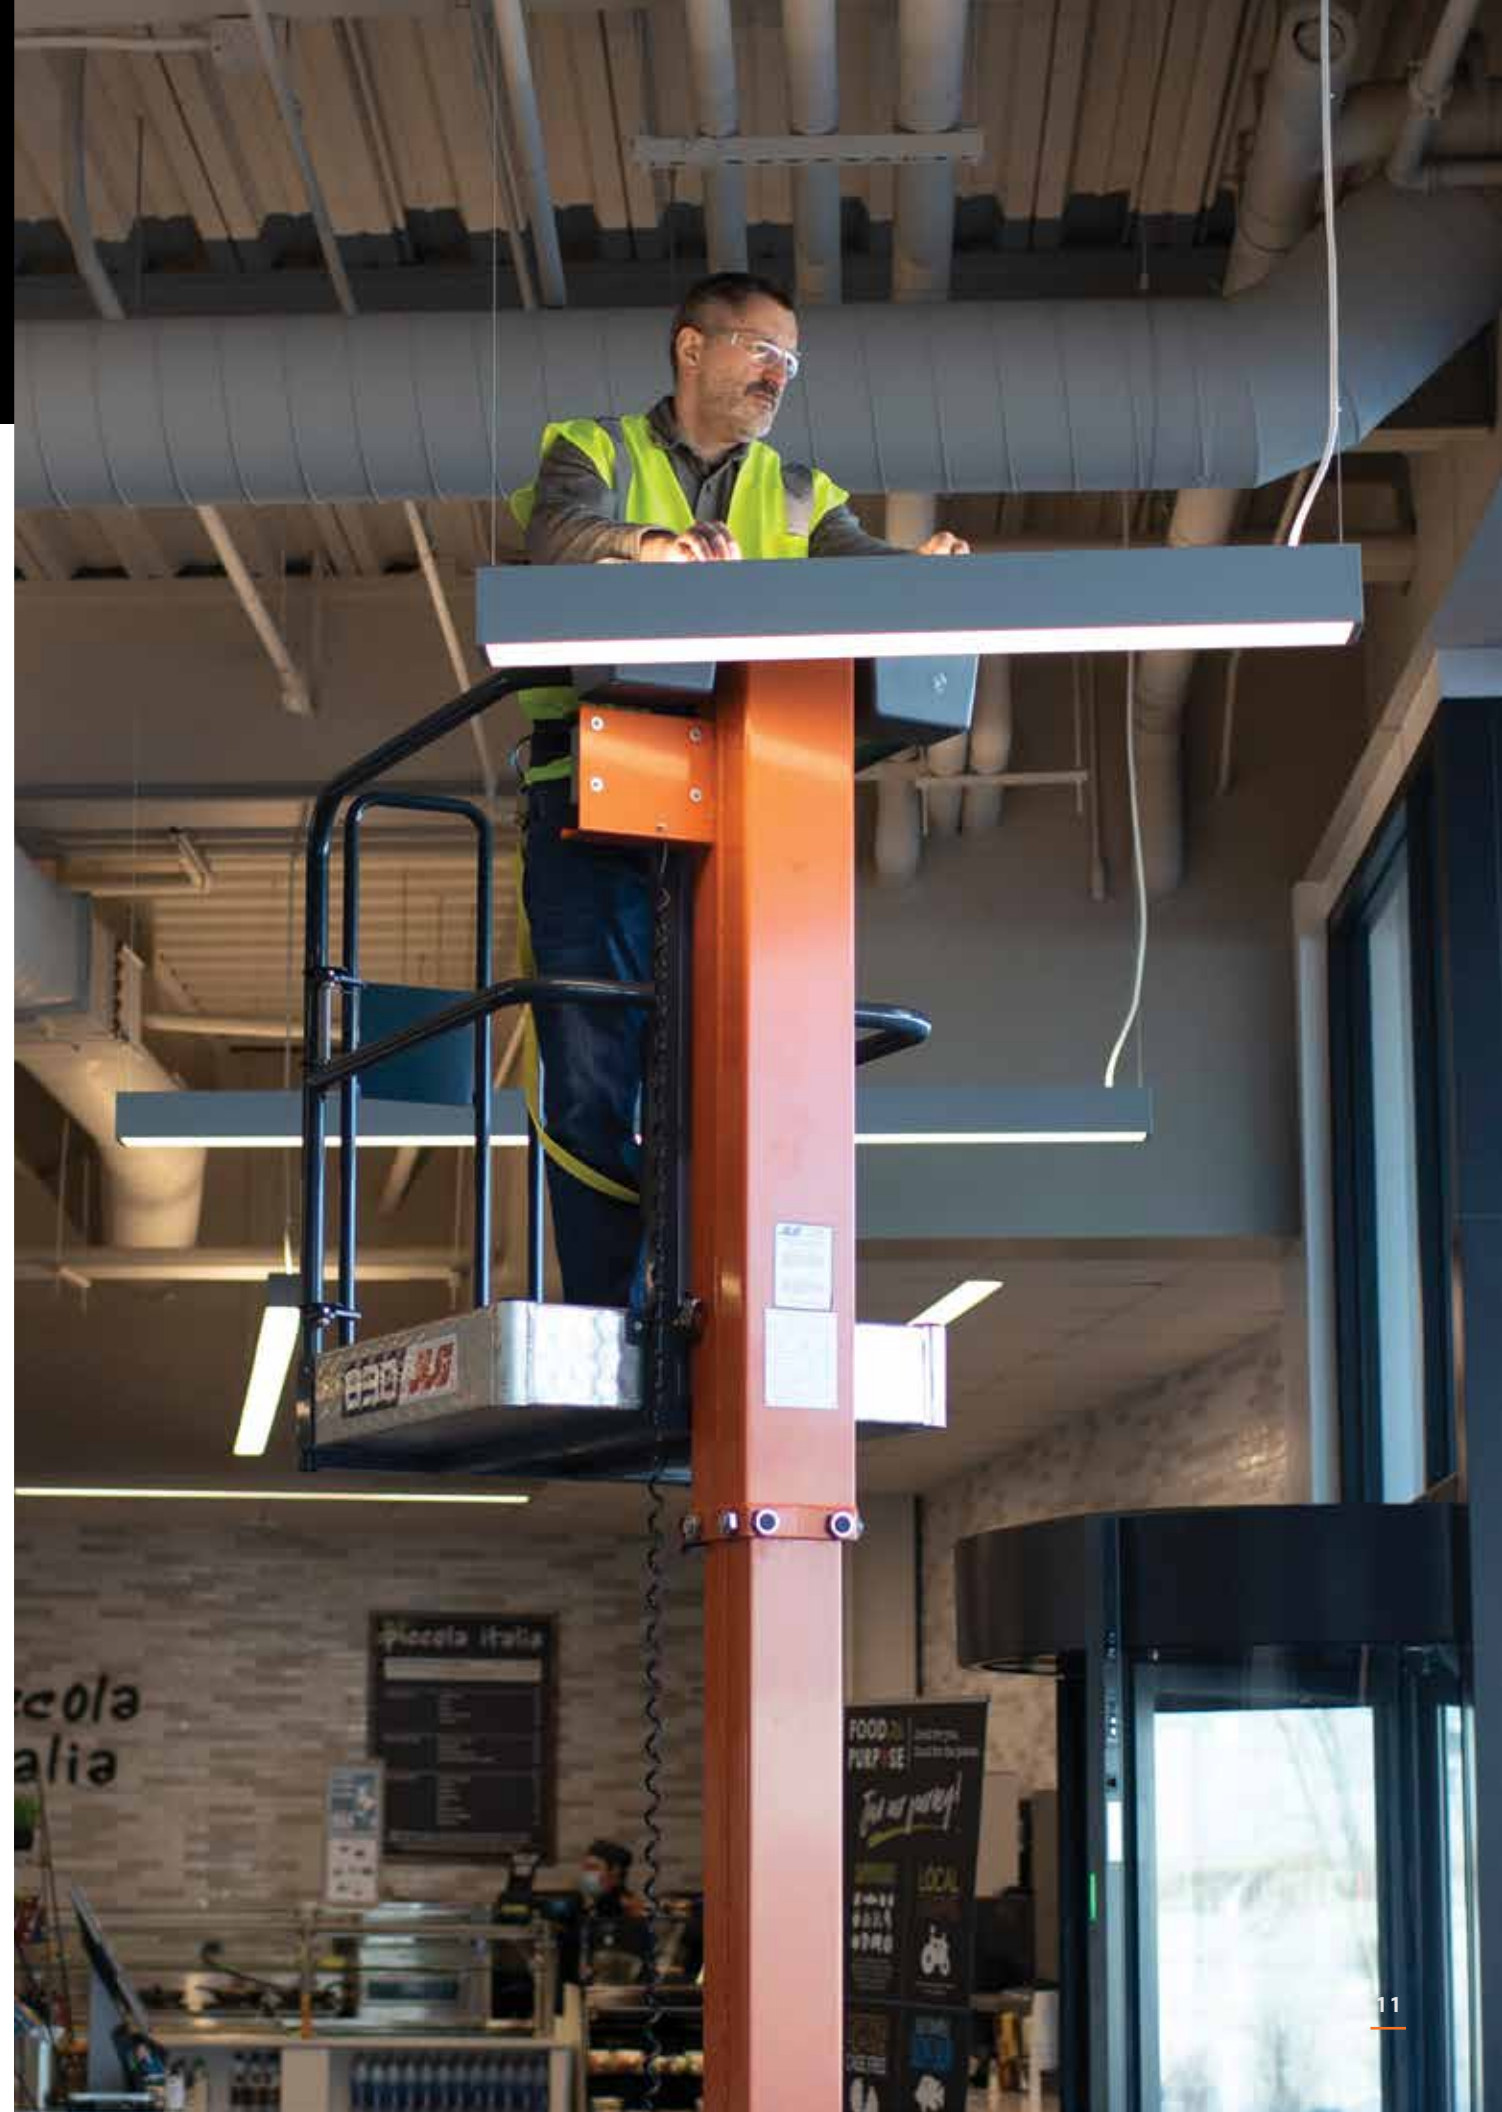

760 rue Bériault, Longueuil, Québec (Canada) J4G 1R8  
1-833-360-3330 | info@sosequiment.ca