

# SJ1256 THS TELEHANDLER

## **KEY FEATURES**

- 12,000 lbs (5,443 kg) Maximum lift capacity
- 56' 3" (17.14 m) Maximum lift height
- 6,000 lbs (2,722 kg) Capacity @ maximum lift height (no outriggers)
- 7,000 lbs (3,175 kg) Capacity @ maximum lift height (on outriggers)
- 42' 4" (12.90 m) Maximum forward reach
- 1,000 lbs (454 kg) Capacity @ maximum forward reach (no outriggers)
- 3,500 lbs (1,588 kg) Capacity @ maximum forward reach (on outriggers)
- Tier 4 final 107hp/320 lb-ft Deutz TCD 3.6L engine
- 22,500 lbs Drawbar pull
- 3-Speed Dana powershift transmission & Dana axles
- Yoke-mounted lifting hook
- 48" Quick attach, floating pin carriage
- Pallet forks, 2.25"x5"x48", 12,000 lbs capacity

## TIRE OPTIONS

- Airless solid rubber 14 x 24
- Non-marking airless solid rubber 14 x 24

## STANDARD FEATURES

- Axle mount outriggers
- Auxiliary hydraulics
- Engine block heater
- Quick attach carriage mount
- Rear window with wiper
- Side window
- Suspension seat
- Single multifunction pilot operated joystick control
- In-cab engine multifunction display
- Hydraulic test ports
- Lockable in-cab storage box
- Rear towing hitch pin
- Steel engine cowling
- Steel component and access covers
- Telematics ready
- ELEVATE Live
- 2-Year Gold Leaf Warranty (5-year structural warranty)

## **FORK OPTIONS**

- Pallet forks, 2.25" x 5" x 48", 60" or 72", 12,000 lbs capacity
- Fully tapered forks, 1.75" x 7" x 48", 12,000 lbs capacity
- Block forks, (set of 6) 2" x 1.5" x 46", 9,000 lbs capacity

† Standard lead times may be increased when optional equipment is added, consult factory Foam- illed tires, standard carriage only. Optional equipment will increase weight.





## SJ1256 THS TELEHANDLER

SPECIFICATIONS	SJ1256 THS
Maximum Lift Capacity	12,000 lbs (5,443 kg)
Maximum Lift Height	56' 3" (17.14 m)
Rated Lift Capacity @ Maximum Height	6,000 lbs (2,722 kg)
Rated Lift Capacity @ Max Height w. O/R	7,000 lbs (3,175 kg)
Maximum Forward Reach	42' 4" (12.90 m)
Rated Lift Capacity @ Maximum Reach	1,000 lbs (454 kg)
Rated Lift Capacity @ Max Reach w. O/R	3,500 lbs (1,588 kg)
Overall Length - Less Forks	23' 1" (7.03 m)
Overall Height - Stowed	8' 6" (2.59 m)
Overall Width	8' 5" (2.56 m)
Ground Clearance	19" (48.26 cm)
Turning Radius - Outside	173" (4.39 m)
Operating Weight	36,625 lbs (16,613 kg)
Engine	107hp / 320 lb-ft Deutz TCD 3.6L T4F
Max Travel Speed - Forward	15 mph (24 km/h)
Drawbar Pull	22,500 lbs
Transmission	Dana Powershift, 3 Speeds F/R
Axles	Dana
Steering	3 mode (Front Wheel, 4 Wheel, Crab)
Tires	Foam-Filled 14 x 24 16PR Grip Lug
Fuel Tank Capacity	35 gal. (132 L)
Hydraulic Reservoir	43.85 gal. (166 L)

#### 58 55 50' 50° 45' 40' LIFT HEIGHT (FT) 35' 30' 25' 20' 4,000 lbs (1,814 kg) 6,000 lbs (2,722 kg) 2,500 lbs (1,134 kg) 10,000 lbs (4,536) 000 lbs (3,629 p (680 kg) kg) **OUTRIGGERS UP** 15' lbs (456 10' ,500 5' 000 0 -4 30' 25' 20' 15' 10' FORWARD REACH (FT)


12,000 lbs (5,443 kg) capacity, 56' 3" (17.14 m) maximum lift height

## **OPTIONS**

- Closed cab (adds front and top window, sliding side window, wipers, full door, heater/defroster, operator fan)
- Air conditioning (closed cab only)
- Premium joystick
- Back up sensor
- Backup sensor and camera
- Service convenience package (remote axle grease points & clean drain engine oil pan valve)
- Cold weather package (cold start engine oil, 50/50 antifreeze mix, battery blanket & hyd. tank heater)
- Arctic weather package (cold start engine oil, 50/50 antifreeze mix, battery blanket, hyd. tank heater & arctic hydraulic oil)
- Four wheel fenders
- Road light package (2 front headlights, front & rear turn signals, tail lights, brake lights)
- Work light package (2 front facing & 2 rear facing halogen work lights)
- Boom light package (2 boom mounted LED work lights)
- Rotating beacon
- Positive air shut-off valve
- Pintle hitch (in lieu of standard hitch pin)
- Non-destructive testing
- ELEVATE telematics
- Warranty Options (3-year or 5-year plans available)

## **QUICK ATTACH CARRIAGES/ATTACHMENTS**

- 48", 60" or 72" Floating pin carriage, 12,000 lbs capacity
- 48", 60" or 72" Floating pin, side tilt carriage, 11,000 lbs capacity
- 72" Floating pin, swing carriage, 11,000 lbs capacity
- 53" Fork positioner, 12,000 lbs capacity
- 2' High capacity jib boom, 10,000 lbs capacity
- 12' or 15' Truss boom, 2,000 lbs capacity
- 1.75 Cubic yard bucket, 4,300 lbs capacity

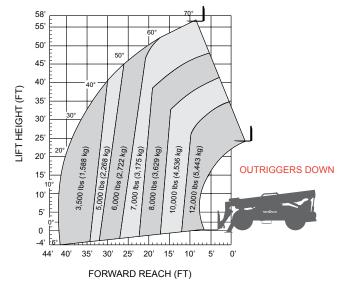

### Skyjack Head Office

55 Campbell Rd. Guelph, ON Canada N1H 1B9 Sales Inquiries: 1-877-755-4387 (1-877-SJLIFTS) Main Switchboard: 1-800-265-2738 Phone: 519-837-0888

Fax: 519-837-8104 Email: skyjack@skyjack.com

## **3** SOSEQUIPMENT

760 rue Bériault, Longueuil, Québec (Canada) J4G 1R8 1-833-360-3330 | info@sosequipment.ca



## www.skyjack.com