


# PLATFORM BASKET 22.10 46KV






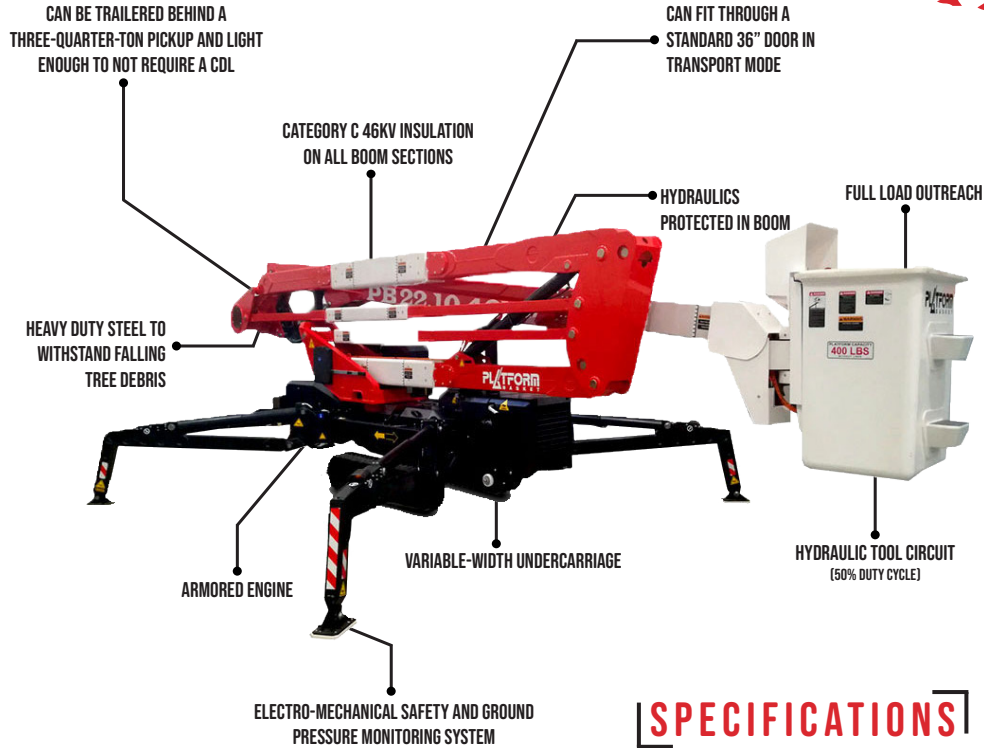


## SPECIFICATIONS

<b>Max. working height</b>	72'
<b>Max. outreach</b>	32'8" (at 300lbs)
<b>Max. basket load</b>	300 lbs
<b>Basket size</b>	2'5" x 1'11" x 3'5" (1-man bucket interior)
<b>Basket rotation</b>	± 90°
<b>Turret rotation</b>	± 180°
<b>Traveling length</b>	25'5"
<b>Traveling height</b>	6'9" (narrow mode) / 7'5" (wide mode)
<b>Traveling width</b>	34.5" (narrow mode) / 44" (wide mode)
<b>Outrigger Spread</b>	14'7" x 14'7"
<b>Battery</b>	12V Emergency Descent System
<b>Diesel engine</b>	15HP
<b>Total weight</b>	7,937 lbs
<b>Gradability, max. across slope</b>	29% (16°)
<b>Gradability, max. up and down slope</b>	29% (16°)
<b>Deployment ability on slopes up to</b>	29% (16°)

## DIAGRAMS

DATA AND DIMENSIONS ARE INDICATIVE AND NOT BINDING

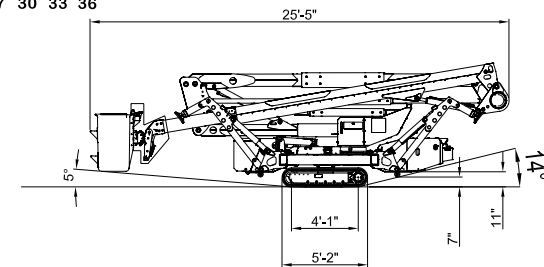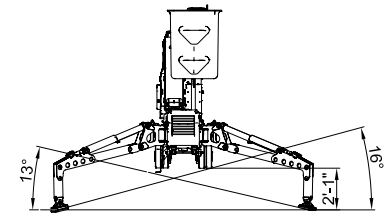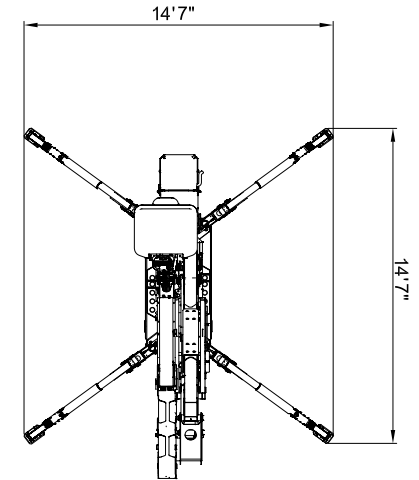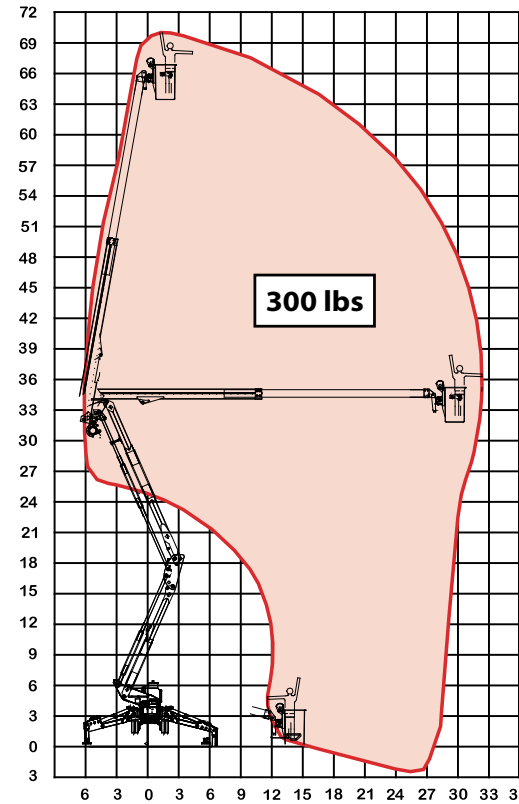

## ADD-ON OPTIONS:

- White Rubber Non-Marking Tracks
- Custom Colors

**SOSEQUIMENT**

760 rue Bériault, Longueuil, Québec (Canada) J4G 1R8  
1-833-360-3330 | info@sossequiment.ca