



SG650RS

All Terrain Manipulator



All outdoor SmartGroup Lifts are designed to raise 18 feet 6 inches (222") high making it possible to install second-story windows from the ground.



Maximum horizontal reach is 11 feet 5 inches (137").



The SG650RS's maximum lift capacity is 1433lbs.



A potentiometer controls the desired speed of the manipulator.



A load cell monitors safe weight and position of material. An LED indicator tells when the unit is approaching load capacity.



The SG650RS is built with the lowest center of gravity in its class (the unit weighs 2590lbs).



Equipped with all-terrain foam filled tires its front-wheel drive is ideal for outdoor or indoor use.

SG650RS ATM All Terrain Manipulator

760 rue Bériault, Longueuil, Québec (Canada) J4G 1R8
1-833-360-3330 | info@sosequipment.ca


760 rue Bériault, Longueuil, Québec (Canada) J4G 1R8
1-833-360-3330 | info@sosequipment.ca

SG Lifts can easily pick up a sheet of glass (or any flat, non-porous material like metal or stone) off an A-frame or out of a crate and carry it safely to complete an installation.

The telescopic boom has three hydraulic segments that can reach full extension with the push of a button.


The SG650RS's dimensions are 35" WIDE
x 60" TALL x 126" LONG.

The SG650RS can be transported in a cargo van or on a utility trailer.

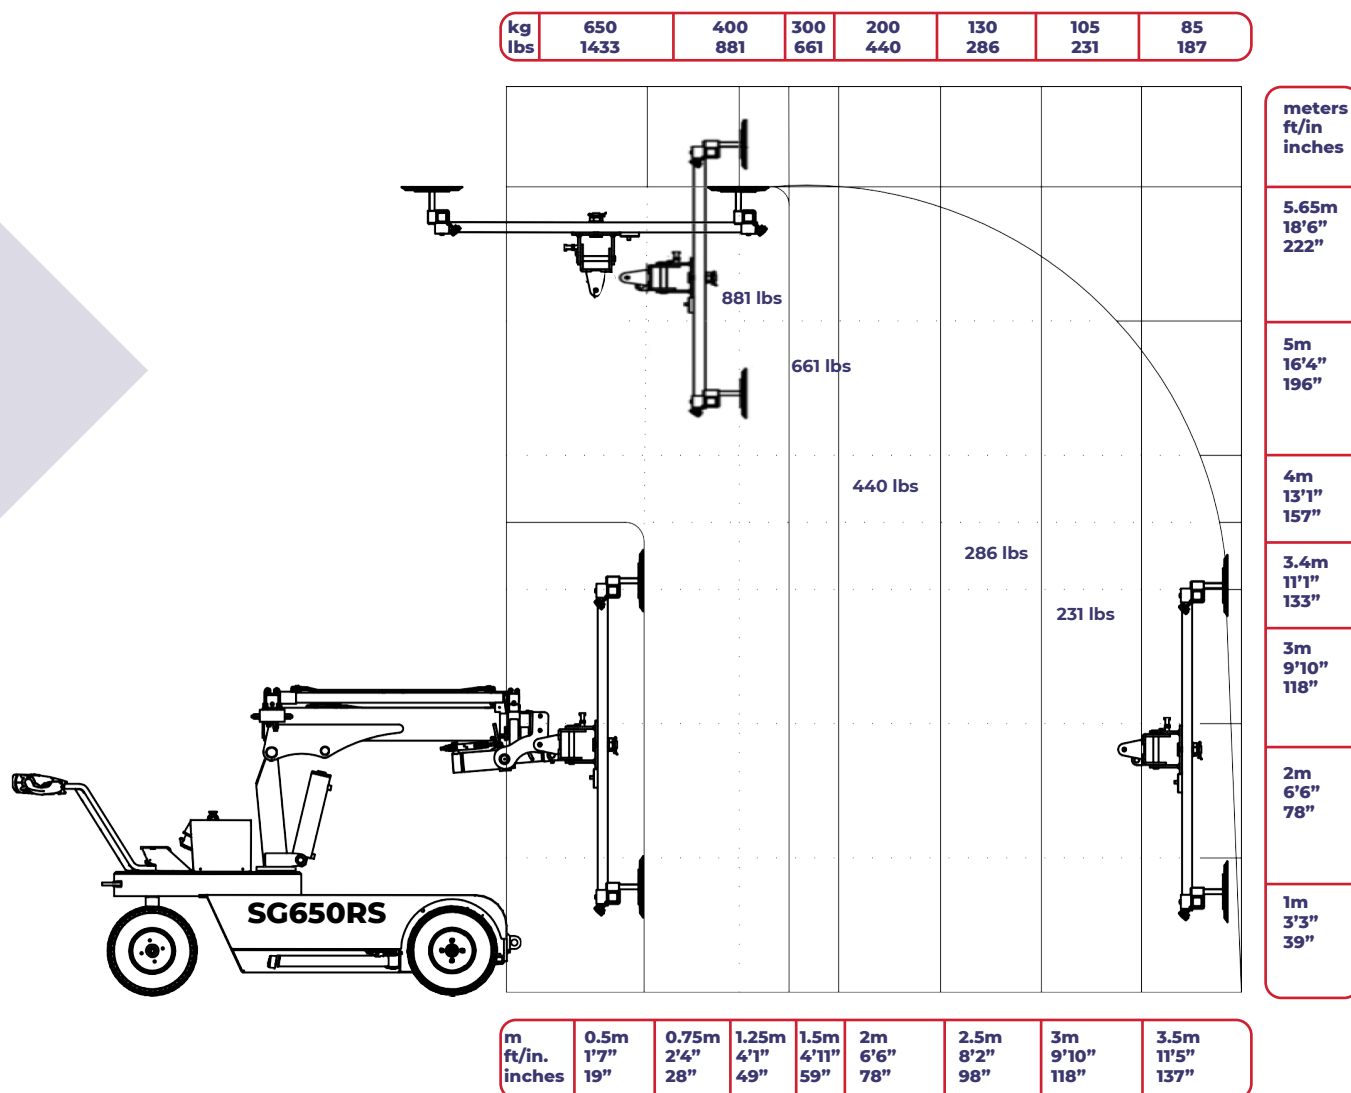

SG650RS ATM

All Terrain Manipulator

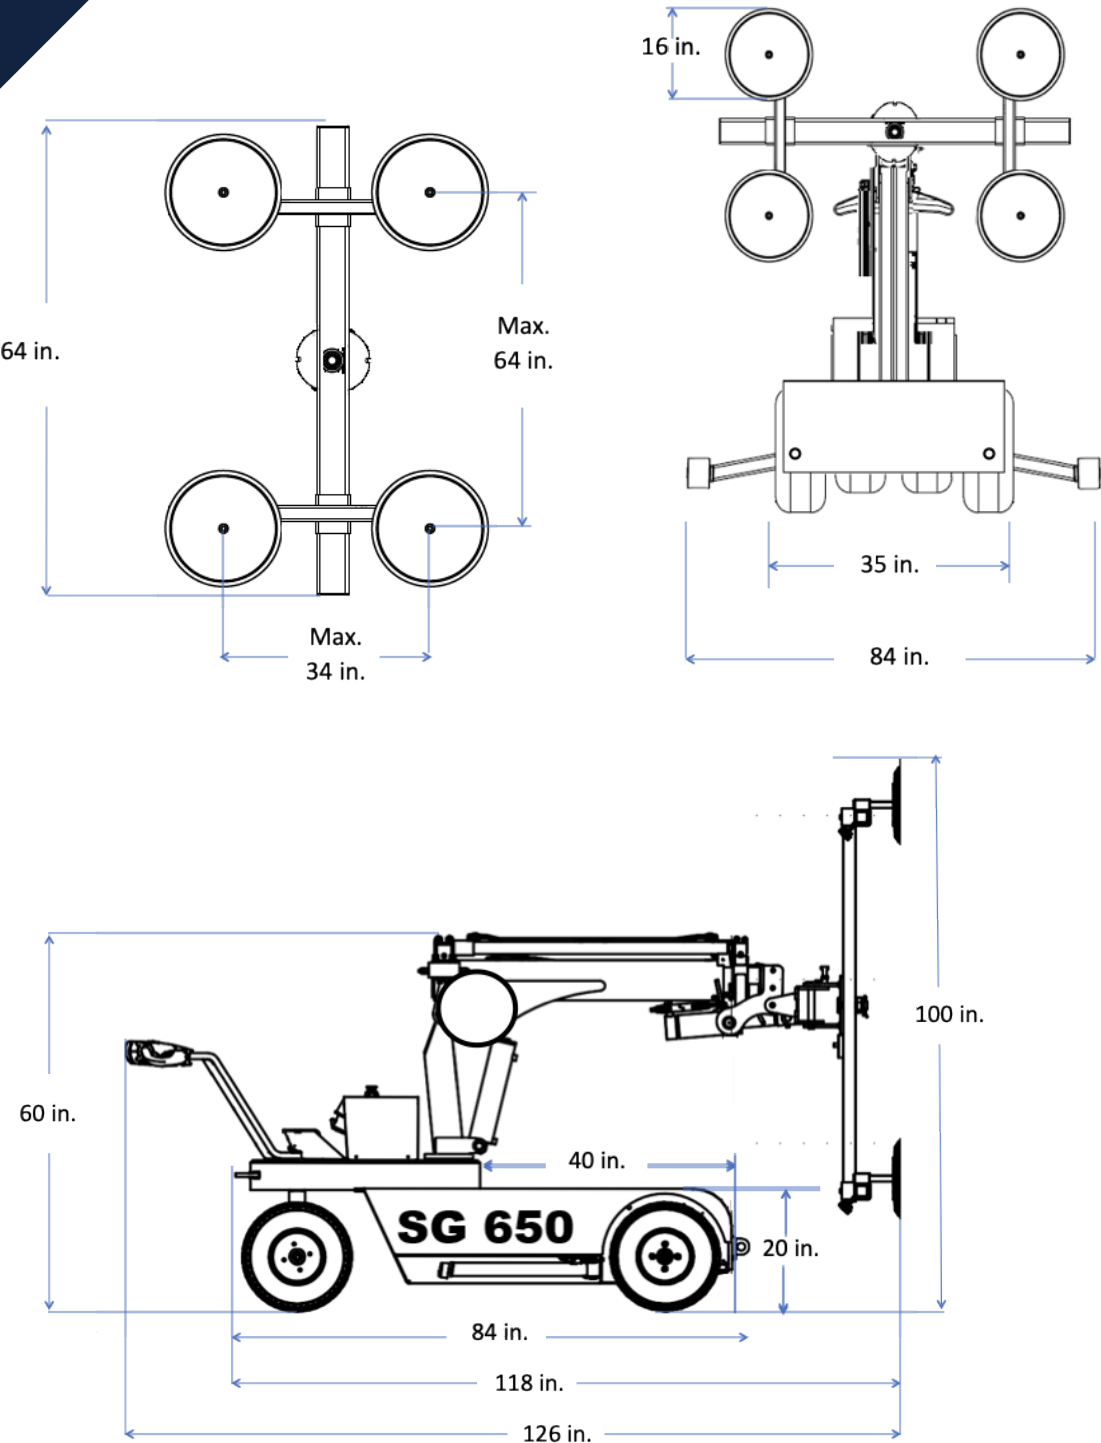

SmartGroup Lift Key Features	SG 650 RS ATM
Maximum Lift Capacity	1433lbs
Vertical Boom Extension (overhead)	18'5" (222") 5.65m
Horizontal Reach	11'5" (137") 3.5m
Machine (WxHxL)	35"x 60"x 126"
Machine weight	2590lbs